



396-4002Y1

CrustBuster 4750 Drill

50' Wide w/o Markers


Tank Mounting Instructions

Drill Manufacturer:



Kit Numbers:

551-02-300450—400 Gal Elliptical Tank, Brackets and Hardware

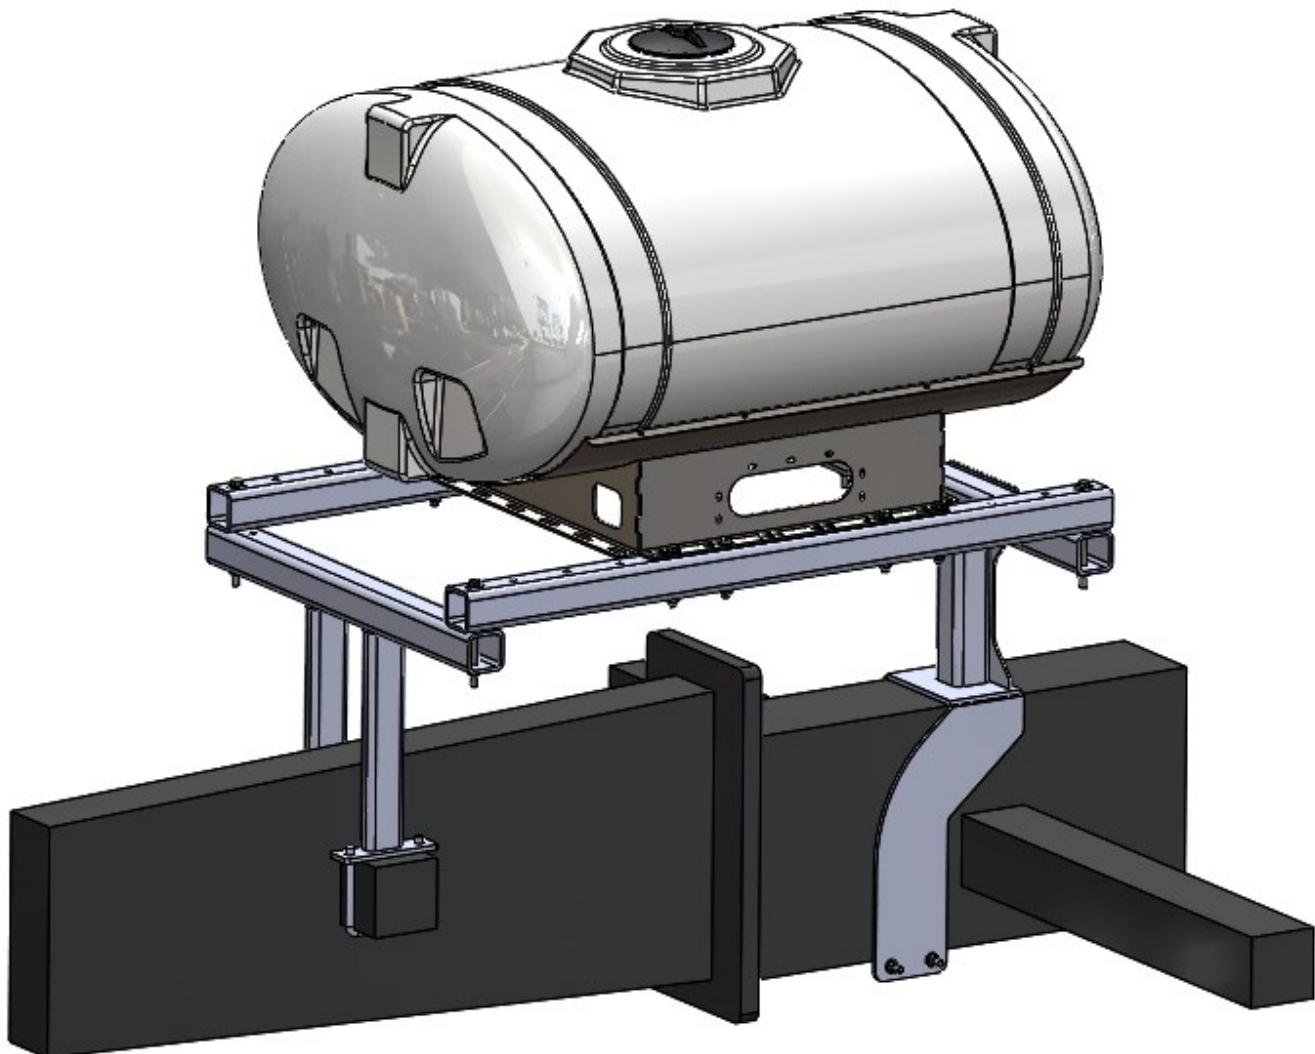



SurePoint Ag Systems

Fertilizer Tank Safety and Warnings



SurePoint Ag Systems does not recommend transporting your implement with full fertilizer tanks. Doing so can result in damage to brackets and implement.



Remember to wear proper PPE (*Personal Protective Equipment*) when installing SurePoint Ag Systems fertilizer tank kits. Proper PPE includes gloves, foot and eye protection, and hearing protection.




SurePoint Ag Systems fertilizer application systems require winterization when not in use. Refer to your product manual for winterization procedures.

Failure to follow the above warnings can result in personal injury, damage to your SurePoint Ag Systems products, and damage to your implement.



Parts List and Exploded View

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|--------------------|--|------|
| 1 | 727-01-HE0400-57-W | Elliptical Tank - 400 Gal - White | 1 |
| 2 | 421-1333A2 | 400 Gallon Elliptical Black Cradle | 1 |
| 3 | 451-3945Y1 | Front Tank Stand - CrustBuster 4750 | 1 |
| 4 | 451-3949Y1 | Rear Tank Stand - CrustBuster 4750 | 1 |
| 5 | 451-3954Y1 | Span Support Beam | 2 |
| 6 | 300-100508-5 | 5/8" x 5 1/2" Hex Head Bolt - G5 | 8 |
| 7 | 300-101000-5 | 5/8" X 10" Hex Head Bolt - G5 | 4 |
| 8 | 300-101400-5 | 5/8" x 14" Hex Head Bolt - G5 | 2 |
| 9 | 330-10 | 5/8" Flat Washer | 16 |
| 10 | 321-10 | 5/8" Nylock Nut | 2 |
| 11 | 323-10 | 5/8" Flange Nut | 12 |
| 12 | 380-1060 | 3/4" U-bolt Kit - Fits 7" x 7" tube (7" opening) | 2 |
| 13 | 525-3000 | 3" Tank Strap Kit for 400 - 750 Gal Tanks | 2 |
| 14 | 521-00-100285 | Tank Overflow Assembly Bag for 400 -750 Gallon Tanks | 1 |
| 15 | 280-100-AG200 | 1" AG200 Bulk | 10' |

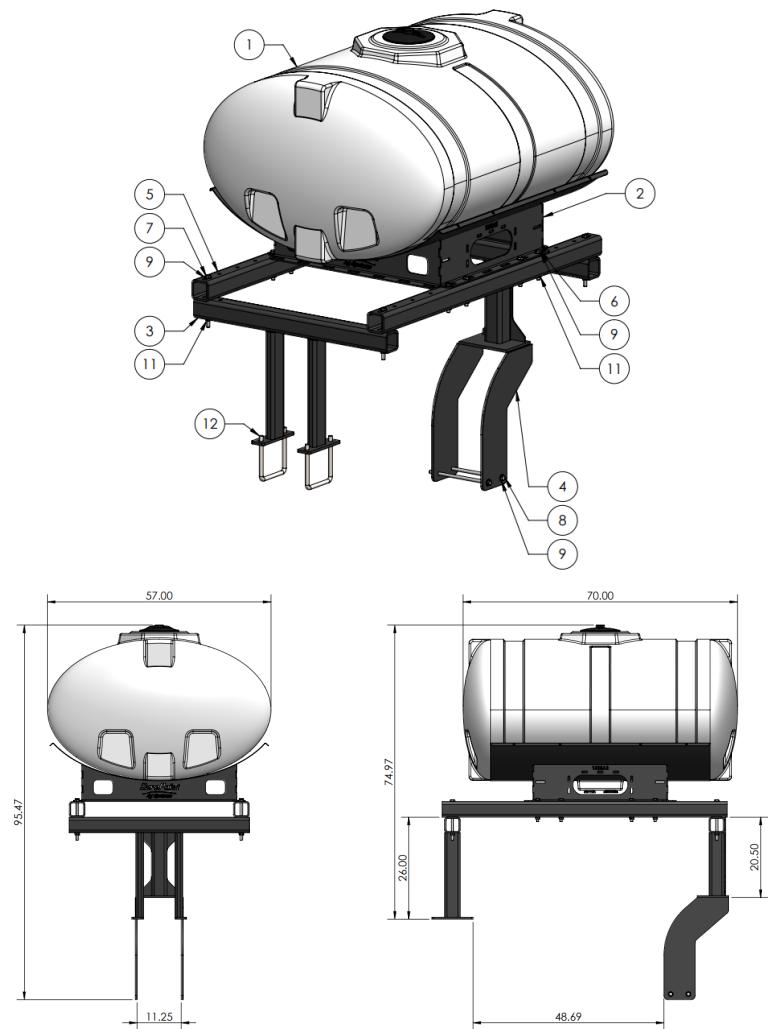

Step by Step Instructions


1. Place the Rear Tank Stand (451-3949Y1) over the rear hitch as shown in picture to the right.
2. Insert the supplied 5/8"x14" Bolts with washers and nylocks. Do not tighten to allow for adjustment in the next steps.

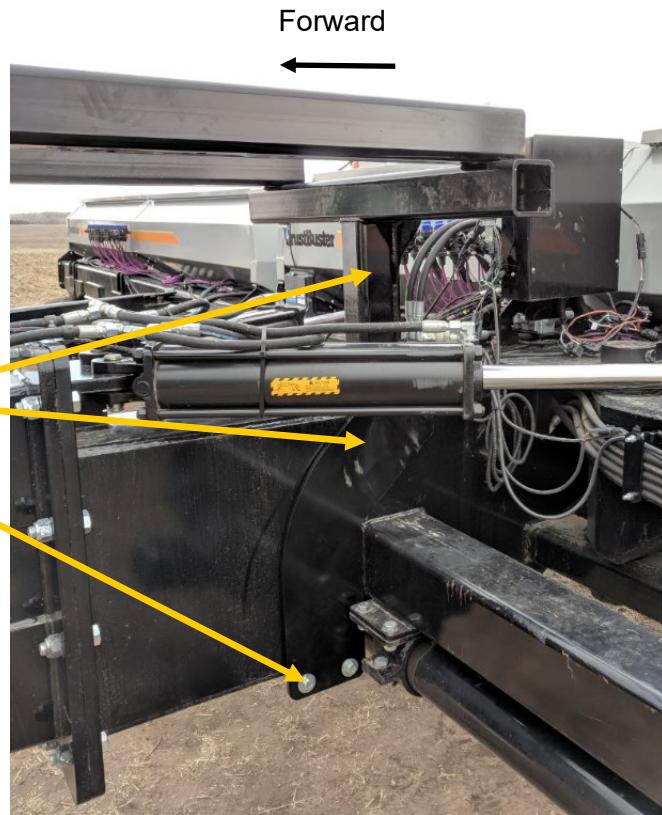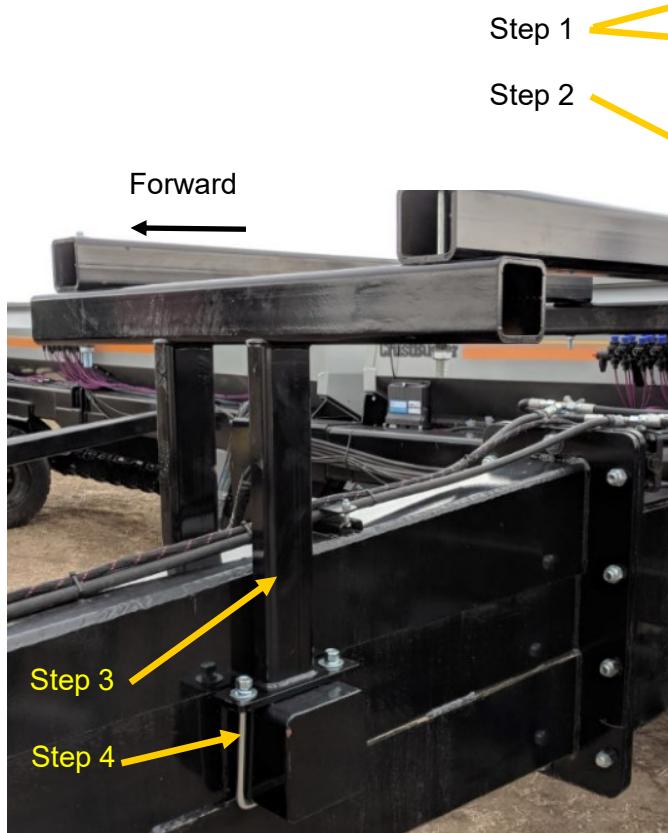

3. Place the Front Tank Stand (451-3945Y1) at the 7"x7" tool bar block out off of the hitch as shown in picture to the left.
4. Insert the supplied 3/4" Square Bend Ubolts as shown with washers, lock washers and nuts. Do not tighten to allow for adjustment in the next steps.


Step by Step Instructions

5. Place the Span Supports Beams (451-3954Y1) on top of the Tank Stands as shown in image below.
6. Install the beams on the outside set of holes of the tank stands.
7. Use the supplied 5/8"x10" bolts (QTY 4) with one washer on top and flange nuts at bottom to install the support beams.
8. Tighten all bolts on the tank stands and support beams.

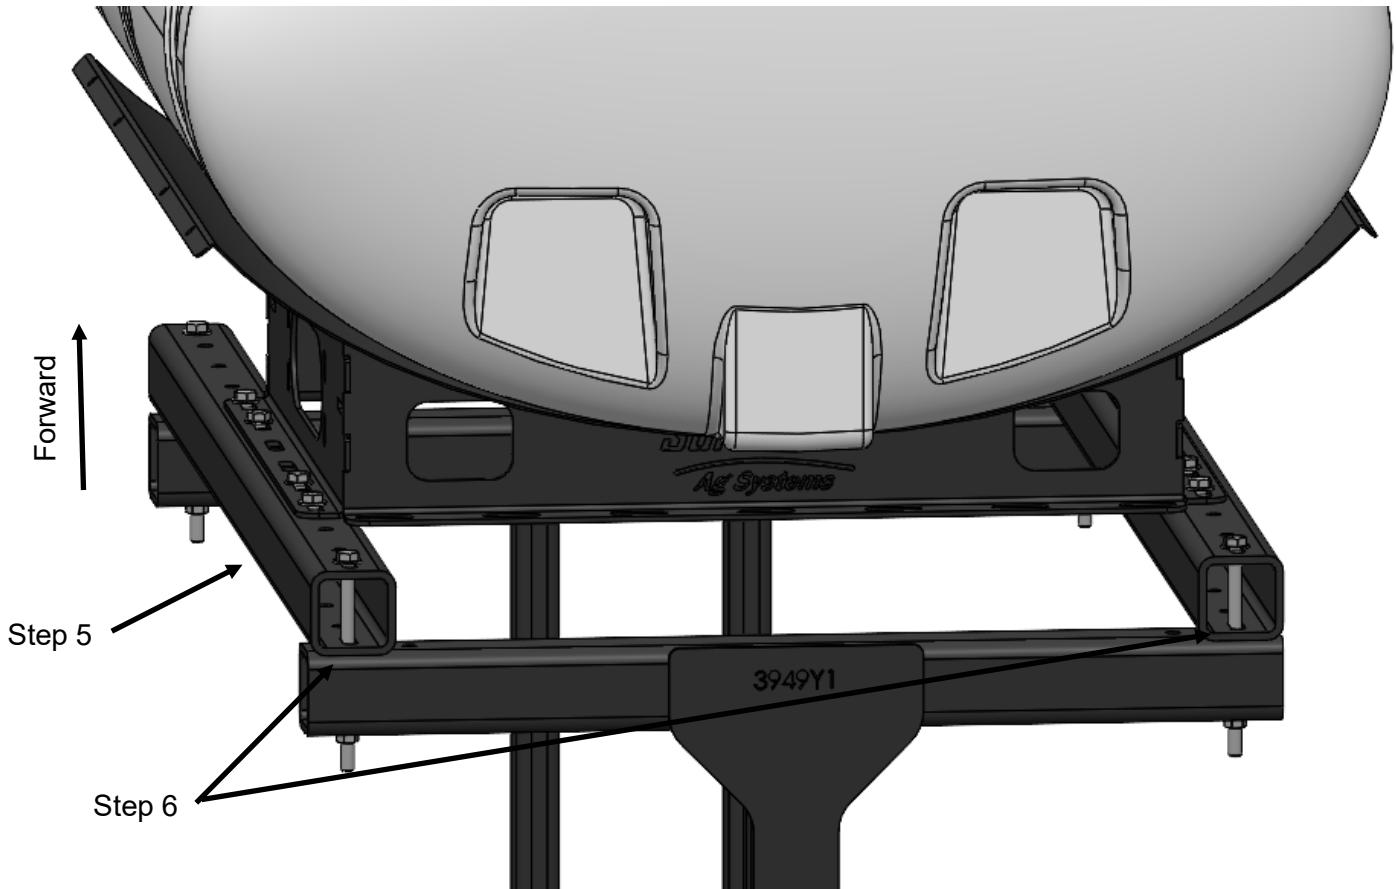

Step by Step Instructions

10. Place the tank and cradle on the support beams. It is best to install towards the rear of the Support Beams to allow room for installation of accessory plumbing such as Hydraulic Pump, Section Valves, etc.
11. Once Cradle is in desired location, use the supplied 5/8"x5-1/2" Bolts (QTY 8) with washers on top and flange nuts on bottom. Tighten all bolts.

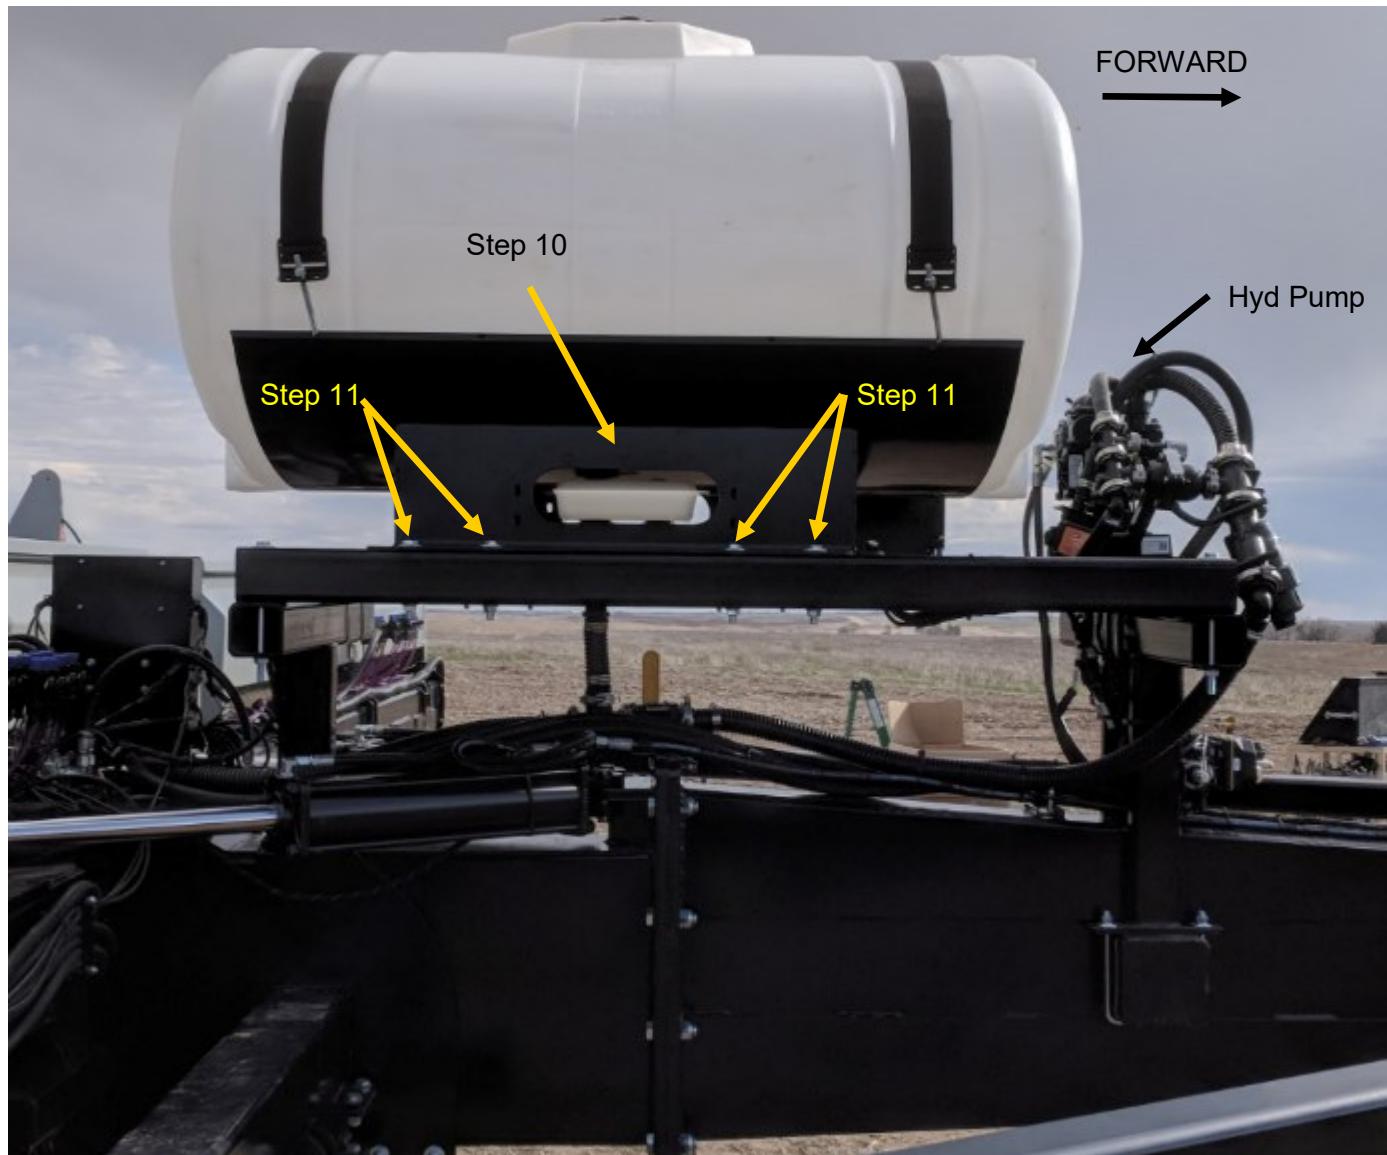

Optional Items that may be suggested for this equipment .

