




396-001861 LiquiShift Single Section KZ Valves Assembly and Mounting

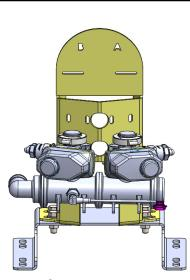


Valve Stack can mount directly to forward/ backward frame. Use optional bracket kit 515-105100 to mount valve stack to lateral frame members. Feed into the section valve stack using 3/4", 1", or 1-1/2" hose from the pump. Each section valve output hose may be split using tees or crosses to feed the necessary number of banks per section.

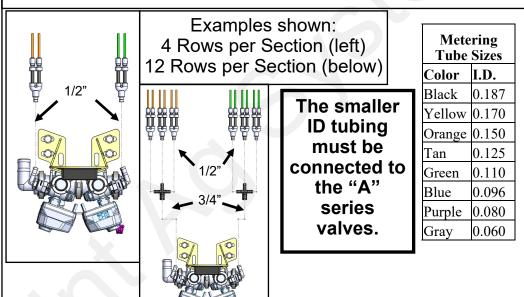

Dual metering tube comes pre-assembled in 3, 4, or 6 row assemblies. 1/2" hose barb ends go to the section valves, 3/8" tubing goes to flow indicators.






Mount flow indicators in banks (can be on one or multiple brackets). Dual metering tube Y's will attach to bottom of flow indicator. Top of flow indicator outputs through check valve to the row.




LiquiShift Single Section KZ Example Generic Setup

Flowmeter Kit	Range	Hose Barb Size
500-02-2050	.3-5 GPM	3/4"
500-02-2060	.6-13 GPM	1"
500-02-2070	1.3-26 GPM	1"
500-02-1080	2.6-53 GPM	1-1/2"

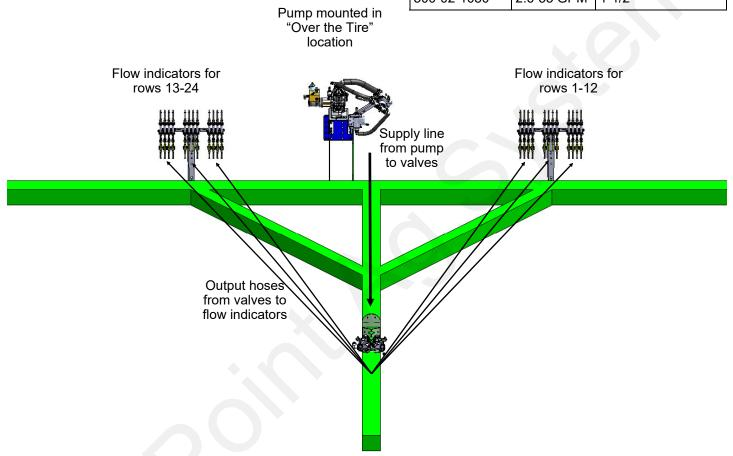

Valves A1 and B1 both feed the pre-assembled metering tube set which goes to the same set of flow indicators.

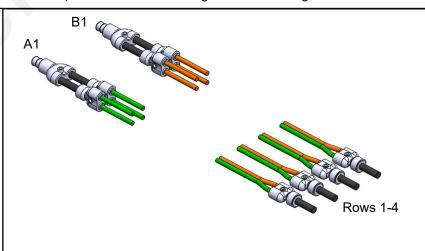



396-001861 LiquiShift Single Section KZ

Page 3 © 2014-2022 SurePoint Ag Systems, Inc.

Revised: 4/27/2022