

396-2946Y1

Kinze 2500/3500 - 100 Gallon Tank Mounting Instructions (6/11 or 8/15 Row)

Planter Manufacturer:



Kit Number: 530-03-200100




Revised: 4/27/2022



Parts List and Exploded View

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	321-08	1/2" Nylock Nut	8
2	304-080108-5	Carriage Bolt - 1/2" x 1-1/2" G5	8
3	330-08	1/2" Flat Washer	8
4	525-2055	2" Strap Kit for Tanks 300 Gallon & Under	2
5	380-1045	5/8" U-Bolt Kit (Fits 7" x 5" Tube)	4
6	420-2483Y1-BK	Black 23" Tank Saddle	2
7	420-2486Y1-BK	Black 24" Saddle "H" Mount	2
8	727-02-SOL100X23	Horizontal Tank - 100 Gallon - 23" Diameter	1

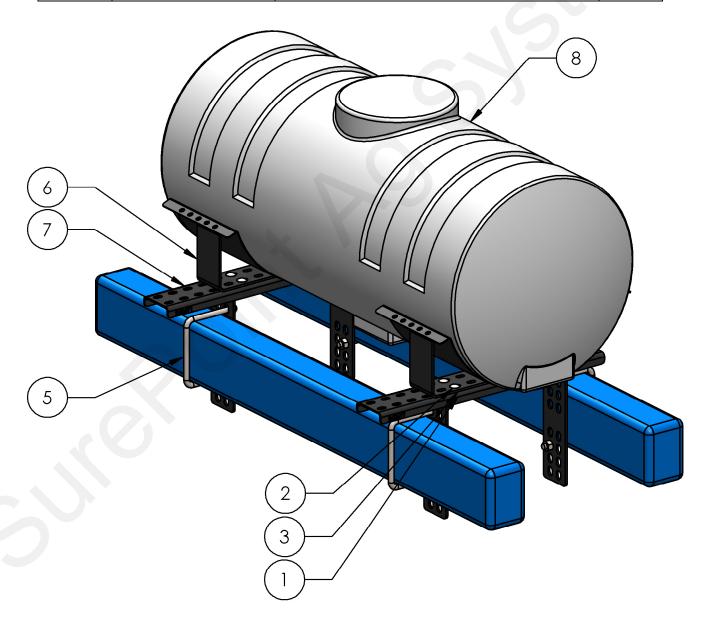



Step by Step Instructions

General Instructions:

- 1. Loosely U-bolt each H-mount bracket (Item 7) to 7x5 toolbars with 5/8"x7"x6-1/2" U-bolts (Item 5). Note: H-mount may be spaced 20"-35" apart depending on space available for planter configuration.
- Position tank saddles (Item 6) on H-mount and loosely attach each saddle with four (4) 1/2" carriage bolts (Item 2), washers (Item 3) and nylock nuts (Item 1). Note: Adjust saddles front to back as necessary.
- Position 100 Gallon tank (Item 8) in saddles and check for interferences. Fasten tank into the saddles using 2" tank straps (Not pictured) and tighten all nuts and bolts.
- 4. Re-tighten straps after filling the tank.

